# Liberty Platinum Sound System

# **Portable Sound System**




The Liberty Platinum is the fourth generation in the twenty year history of the Liberty. It just keeps getting better with advances in audio technology, music players, LED development and speaker performance.

The Liberty Platinum maintains the integrity of the very first Anchor product - Intelligible Sound, Reliable Performance and Simplicity of Use.



# **LIBERTY ACCESSORIES**

MIC-90	Professional dynamic, cardioid pattern handheld microphone
NL-7500	Nylon Slip Cover
HC-1640	Pelican hard case
MP3-TOTE	Holds MP3 Player & Mic
S0FT-7500	Soft Rolling case

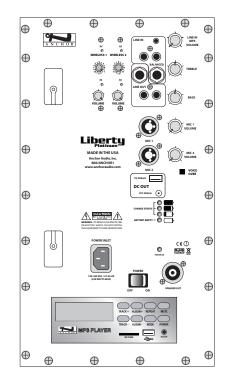

## LIBERTY MODELS

LIB-7500	AC/DC powered sound system
LIB-7500M	Built-in MP3 player
LIB-7500U1	1 built-in wireless receiver
LIB-7500U2	2 built-in wireless receivers
LIB-7500MU1	Built-in MP3 player & 1 built-in wireless receiver
LIB-7500MU2	Built-in MP3 player & 2
	built-in wireless receivers
LIB-7501	Unpowered speaker

### **Features**

Reach Crowds of 2,000+

AC Mode = 125W / DC Mode = 100W

Single or Dual Built-in UHF Wireless w/ 16 User Selectable Channels

Built-In MP3 Player Accepts SD Card, USB Flash Drive or 3.5mm input for iPod

USB Port for Charging MP3/iPod®

"Voice Over" Music Ducking Feature

Two Universal Mic Input Jacks

Recessed Back Panel Protects Knobs and Ports

True AC/DC - 110/220V Power Supply

**Ceramic Compression Driver** 

10" Neodymium Woofer

**Proprietary Class D Amplifier** 

User Replaceable Batteries

Charging LED Bar Indicator

Operates 6-8 hrs on a Single Charge

Speaker Out to Power Companion Speaker

#### **UHF WIRELESS**

WH-6000 Wireless Handheld mic/

transmitter

Wireless body-pack transmitter WB-6000

w/ handsfree microphone.

Mic options include:

Over-the-Ear/EM-TA4F, Lapel/LM-

60, Collar/

CM-60, Headband/HBMTA4F

#### **TECHNICAL SPECIFICATIONS**

Rated Power Output Max SPL @ Rated Power **Battery** 

Full recharge: approx 7 hrs. 60 Hz - 15 kHz ± 3dB

Frequency Response Line Output (post fader) AC Power Regs. DC Out

12V 500mA 5V 500mA

Dimensions (HWD) Weight

CE ROHS

USB

125 watts AC / 100 watts DC 110 dB

Two 12 Volt rechargeable, 9.0 AH

isolated, 600 ohm, 1/4" phone 100 - 240 VAC, 50/60 Hz, 300W max

22" x 14" x 11.5" (56 x 35.6 x 29.2 cm)

38 pounds / 17 Kg

Lo-Z (1 K $\Omega$ ), balanced, XLR Mic Inputs:

12 VDC condenser mic (phantom) power Hi-Z (10 K $\Omega$ ), unbalanced, 1/4'' phone Hi-Z (10 K $\Omega$ ), unbalanced, 1/8'' stereo,

1/4" phone


Line In/Out unbalanced, stereo RCA

Sensitivity For Rated Output

Lo-Z Microphone -52 dBV (2.5 mVrms) Hi-Z Microphone -43 dBV (7.5 mVrms) Auxiliary (line) -14 dBV (200 mVrms) 36V

**Phantom Power** Speaker Out

8 ohm Speakon





Anchor Audio, Inc.