



AMU1-3G
AUDIO MONITORING
UNIT

Handbook

TSL
Vanwall Road, Maidenhead, Berkshire, SL6 4UB
Telephone +44 (0)1628 676200, FAX +44 (0)1628 676299

This Page is Blank

SAFETY

Installation.

Unless otherwise stated TSL equipment may be installed at any angle or position within an operating temperature range of 5° - 30°C.

All TSL equipment conforms to the EC Low Voltage Directive:

EC Low Voltage Directive (73/23/EEC)(OJ L76 26.3.73)(LVD). Amendment: (93/68/EEC) (OJ L220 30.8.93).

In all cases the frame of the equipment must be earthed on installation.

Where appropriate, the earth pin on the IEC mains inlet connector is connected to the metal frame of the equipment, to 0 volts on the internal DC PSU and to signal ground unless otherwise stated. All metal panels are bonded together.

Check that the voltage selector setting (if fitted) and the fuse rating is correct for the local mains supply.

Due consideration for cooling requirements must be given when mounting the equipment. It is recommended that a 1RU of rack space, or a vent panel, should be left above and below the unit.

WARRANTY, MAINTENANCE AND REPAIR

All TSL equipment is guaranteed for one year from the date of delivery to the customer's premises. If the equipment is to be stored for a significant period, please contact TSL concerning a possible extended warranty period.

Failure during warranty

If any TSL product should fail or become faulty within the warranty period, first please check the PSU fuses.

All maintenance work must be carried out by trained and competent personnel.

If equipment has to be returned to TSL for repair or re-alignment, please observe the following overleaf:

TSL Returns Procedure

Please telephone +44 (0)1628 676200 (Fax: +44 (0)1682 676299) and ask for Sales who will provide a Returns Number. This will enable us to track the unit effectively and will provide some information prior to the unit arriving. Please do **NOT** return faulty equipment without first obtaining a returns number as this is likely to result in a delay in the repair of the equipment.

For each item, this unique Returns Number must be included with the Fault Report sent with the unit.

A contact name and telephone number are also required with the Fault Report sent with the unit.

Fault report details required.

- Company:
- Name:
- Address:
- Contact Name:
- Telephone No:
- Returns Number:
- Symptoms of the fault (to include switch setting positions, input signals etc):

Packing

Please ensure that the unit is well packed as all mechanical damage is chargeable. TSL recommends that you insure your equipment for transit damage.

The original packaging, when available, should always be used when returning equipment..

If returned equipment is received in a damaged condition, the damage should be reported both to TSL and the carrier immediately.

This Page is Blank

Contents

- 1.0 Introduction**
- 2.0 Front Panel Controls and Indicators**
 - 2.1 Input and Meter Selection Switches**
 - 2.2 Monitoring Selection Switch**
- 3.0 Pin-out Details**
 - 3.1 Analogue XLR Connectors**
 - 3.2 AES XLR connectors**
 - 3.3 Analogue Output connector – D25 Socket Pin out**
 - 3.4 AES Input/Output connector**
 - 3.5 DIP switch configuration functions**
- 4.0 Notes**
- 5.0 General Notes**
- 6.0 Specifications**

1.0 Introduction

The AMU1-3G is a 1RU x 340mm deep Audio Monitoring Unit with two 26 segment bargraphs for audio level measurement.

The following features are standard:

- Two switch selectable stereo analogue inputs
- Four AES /EBU inputs
- Two HD/SDV auto sensing inputs.
- Dolby E decoding.
- Out-of-phase error indication.
- EBU Digital and PPM metering scales.
- Metadata output.
- Encoded PAL/NTSC composite or SDI output (Switch selectable)
- Re-clocked serial output of the selected input.
- Integral loudspeaker system.
- 40 Watt total amplifier power with 12VDC input.
- Headphone outputs with LS muting.
- Two 12V DC inputs.
- Stereo /multi channel line outputs.
- Four decoded AES outputs.
- Variable line output.

2.0 Front Panel Controls and Indicators

2.1 Input and Meter Selection Switches

Source Select	Analogue/AES 1-2 and 3-4, SDI 1 & 2 Groups 1-4
Channel Select	Selects A or B pair from chosen input
Meters	Left Channel is fed to the left bargraph and Right Channel is fed to the right bargraph.
Phase	Momentary phase reverse between A1 and A2 pairs. A non latching push switch with Red/Green LED indicates phase. Push to reverse.
Volume Control	Allows the audio level to be varied.

2.2 Monitoring selection Switch (Including DOLBY indicator/switch)

This switch has two functions. When the unit is receiving a Dolby signal, which can be carried on an AES or SD/HD embedded audio data stream, the DOLBY indicator will show green and the outer green characters on this switch will apply. These are as follows: Lt Rt, Left Right, C LFE, and Ls Rs. (Left total, Right Total, Centre, Low Frequency Effects and Left Surround, Right Surround.) These stems are monitored in pairs.

When a DOLBY signal is NOT present the DOLBY presence indicator changes colour to amber and the inner white text applies. Under these conditions the following can be monitored, Stereo, Left, Right and Mono.

With the output selector in the Lt Rt /stereo position:

Pressing the Dolby button will enable/disable the decoded 6/8 channel line outputs as follows;

Disabled (default): First pair only active with Lt Rt, other pairs muted.

Enabled: Full 5.1 or 7.1 decoding.

3.0 Pin-out Details

3.1 Analogue XLR Connectors


C	PIN	FUNCTION
ANALOG 1	1	GND
ANALOG 1	2	1 IN+
ANALOG 1	3	1 IN-
ANALOG 2	1	GND
ANALOG 2	2	2 IN+
ANALOG 2	3	2 IN-

3.2 AES XLR Connectors

C	PIN	FUNCTION
AES1	1	GND
AES 1	2	1 IN+
AES 1	3	1 IN-
AES 2	1	GND
AES 2	2	2 IN+
AES 2	3	2 IN-


3.3 Analogue Output Connector – D25 Socket Pinout

D 25 PLUG ON AMU	AUDIO OUTPUTS
PIN NO	FUNCTION
1	A8+ (7.1)
14	A8- (7.1)
2	Ground
15	A7+ (7.1)
3	A7- (7.1)
16	Ground
4	A6+ (RS)
17	A6- (RS)
5	Ground
18	A5+ (LS)
6	A5- (LS)
19	Ground
7	A4+ (LFE)
20	A4- (LFE)
8	Ground
21	A3+ (Centre)
9	A3- (Centre)
22	Ground
10	A2+ (FR)
23	A2- (FR)
11	Ground
24	A1+ (FL)
12	A1- (FL)
25	Ground
13	N/C

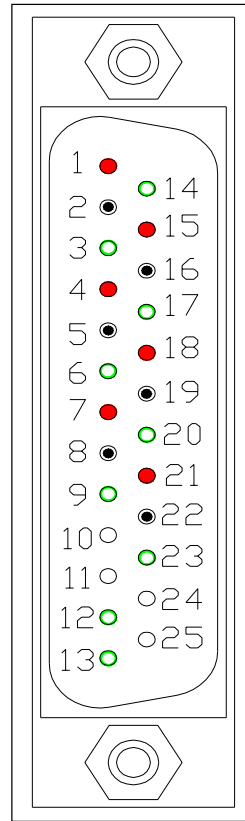

3.4 AES Input/Output Connector – D25 Socket Pinout

D 25 PLUG ON AMU	AES INPUTS/OUTPUTS
PIN NO	FUNCTION
1	Ch1&2 Input 1+
14	Ch1&2 Input 1-
2	Ch3&4 Input 2+
15	Ch3&4 Input 2-
3	Ch5&6 Input 3+
16	Ch5&6 Input 3-
4	Ch7&8 Input 4+
17	Ch7&8 Input 4-
5	Ch1&2 Output 1+
18	Ch1&2 Output 1-
6	Ch3&4 Output 2+
19	Ch3&4 Output 2-
7	Ch5&6 Output 3+
20	Ch5&6 Output 3-
8	Ch7&8 Output 4+
21	Ch7&8 Output 4-
9	N/C
22	Ground
10	Ground
23	Ground
11	N/C
24	Ground
12	Ground
25	Ground
13	Ground

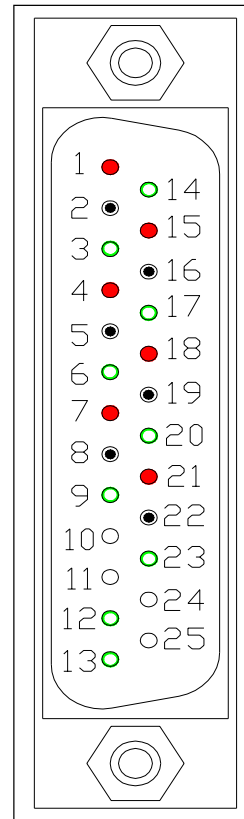

3.5 Configuration Switch Functions (Beta s/w)

SWITCH SECTION	FUNCTION
1	PPM – Up/ EBU Digital – Down
2	Peak Hold OFF-Up
3	Internal speaker Mute- Up
4	Calibration Level – see below
5	Calibration Level – see below
6	Calibration Level – see below
7	Stereo Mix Lo Ro – Up/Lt Rt Down
8	Composite out-Up/SDI \Down

The level configuration switches on the HDC2 board operates in a “2’s complement” manner the relationship between the dBfs level setting in the digital domain and the dBm level setting in the analogue domain. The “zero” position with all switches in the down position is designed to give 0dBm out for a level of -18dBfs in digital space. See below for configuration

SW4	SW5	SW6	FUNCTION
UP	UP	DN	-24dBFS
DN	UP	DN	-22dBFS
UP	DN	DN	-20dBFS
DN	DN	DN	-18dBFS
UP	UP	UP	-15dBFS
DN	UP	UP	TBD
UP	DN	UP	TBD
DN	DN	UP	TBD

(See Notes 4.0)

4.0 Notes

There are no user adjustable assemblies/components within this unit.

This unit requires rear support when rack mounted.

In order to affect status changes of the unit using the rear DIP switch, the unit will require re powering before the changes take effect.

Output analogue levels are adjustable over the following range:

0dBm = 0.775V into 600Ω i.e. 1mW power dissipation.

0dBu = 0.775V RMS = PPM 4.

Nominally, -18 dB ref 0FS = 0dBu output.

European line up : -18 dBu

American line: -20 dBu

5.0 General Notes

Please note that some American equipment has the function of the XLR pins 2 & 3 reversed.

TSL product is wired to the European standard

The screw locks on the D25 connectors use UNC 4-40 standard threads.

6.0 AMU1- 3G Technical Specifications

Power Supply

Supply Voltage	12V DC
Power Consumption	50 watts.

Physical Dimensions

Height	44mm (1RU)
Width	483mm (19")
Depth	340mm
Weight	6900gm

Analogue Inputs 1 - 2

Connector Type	XLR Female 3 pin. Pin 1 Gnd, Pin 2 hot, Pin 3 cold.
Signal	Balanced line level audio.
Frequency Response	30Hz to 25kHz
Impedance	>20k Ω

Inputs AES 1, 2, 3 & 4

Connector Type	XLR Female 3 pin. Pin 1 Gnd, Pin 2 hot, Pin 3 cold.
Standard	AES3 (1994) at 48kHz, 44.1kHz or 32kHz
Impedance	110 ohm (balanced.)

Input, HD/SDV 1 & 2

Connector Type	BNC.
Standard	4:2:2 component with embedded 48Khz audio. (SMPTE 259M, 292M and 424M)
Impedance	75ohm

Line Output.

Connector	XLR 3 pin Male
Impedance	50 Ω
Output Levels	Through level control with 0dB gain.
Fixed Line O/P	Available on D25 (If selected on front panel)

Headphone Output.

Connector	Stereo Jack socket type A
Impedance	50 Ω
Output Levels	Through level control with 0dB gain.

De embedded output

Connector	25 way D type
Impedance	110 Ohm
Output	Groups 1, 2, 3 and 4

Video Output

Connector	BNC
Impedance	75 Ohm
Output	Composite video or SDI (selectable)

Re-clocked Output

Connector	BNC
Impedance	75 Ohm
Output	Re-clocked serial output of the SELECTED input HD/SDV

AES Output

Connector	AES I/O, 25 way D type (See section 3.3 for details)
Impedance	110 Ohm
Output	Selected SDI group.

Metadata Output

Connector	Aux D9 (RS422)
-----------	----------------

HD Standards Supported

1080i/50
1080i/59.94
1080i/60
1080P/50
1080P/59.94
1080P/60
720p/50
720p/59.94
720p/60

Performance

Response	70Hz to 20KHz
Electrical Distortion	Better than 0.1%
Hum and noise	Better than -80dB
SPL	>98dB at 0.6 m
Amplifier Output	40 watts total power output
Digital Sample Rate	32 to 48KHz auto select